


NORMACLAMP® FBS



Spring band clamp that ensures excellent sealing reliability

- ✓ One-piece, bolt-free hose clamp
- ✓ Optimum roundness
- ✓ Even distribution of clamping force
- ✓ Automatically re-tensions

NORMACLAMP® FBS

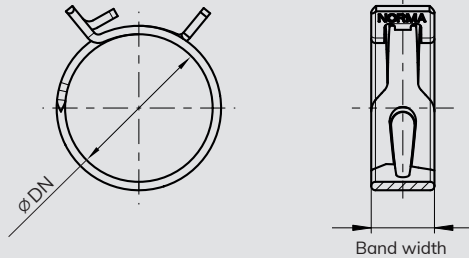

Applications

FBS is well suited to applications involving poly and braided tubing that require a complete seal, e.g. for:

- Machine building
- White goods
- Agricultural machines
- Engine manufacturing
- Cooling and heating water circuits
- Fuel vent systems

Materials


Group	C 75 S
Double coat	Zinc/Aluminium

Band width (mm)	Description	Clamping range $\varnothing DN$ (mm)	Part number		Packaging quantity (pcs)
			Black	Silver	
12	FBS 13	14.5	0112 8024 013	0112 8074 013	100
12	FBS 14	15.8	0112 8024 014	0112 8074 014	100
12	FBS 15	16.8	0112 8024 015	0112 8074 015	100
12	FBS 16	17.5	0112 8024 016	0112 8074 016	100
12	FBS 17	18.5	0112 8024 017	0112 8074 017	100
12	FBS 18	19	0112 8024 018	0112 8074 018	100
12	FBS 19	21	0112 8024 019	0112 8074 019	100
12	FBS 20	21.6	0112 8024 020	0112 8074 020	100
12	FBS 21	22.5	0112 8024 021	0112 8074 021	100
12	FBS 22	24.5	0112 8024 022	0112 8074 022	100
12	FBS 23	24.7	0112 8024 023	0112 8074 023	100
12	FBS 24	26	0112 8024 024	0112 8074 024	100
12	FBS 25	27	0112 8024 025	0112 8074 025	100
12	FBS 26	28	0112 8024 026	0112 8074 026	100
12	FBS 27	29	0112 8024 027	0112 8074 027	100
12	FBS 28	30.5	0112 8024 028	0112 8074 028	100
12	FBS 29	31.5	0112 8024 029	0112 8074 029	100
12	FBS 30	32.5	0112 8024 030	0112 8074 030	100
12	FBS 32	34.5	0112 8024 032	0112 8074 032	100
12	FBS 35	38	0112 8024 035	0112 8074 035	100
12	FBS 36	39	0112 8024 036	0112 8074 036	100
12	FBS 38	41.5	0112 8024 038	0112 8074 038	100
12	FBS 40	42.5	0112 8024 040	0112 8074 040	100
12	FBS 42	44.5	0112 8024 042	0112 8074 042	100
12	FBS 44	46.5	0112 8024 044	0112 8074 044	100
12	FBS 46	49	0112 8024 046	0112 8074 046	100
12	FBS 47	50	0112 8024 047	0112 8074 047	100
12	FBS 50	53	0112 8024 050	0112 8074 050	100
12	FBS 55	58	0112 8024 055	0112 8074 055	100
12	FBS 60	63	0112 8024 060	0112 8074 060	100

Technical benefits

- ✓ Temperature resistance from -40 °C to 200 °C
- Double layered chromium VI-free coating
- ✓ that provides optimum corrosion and chemical protection

NORMACLAMP® FBS is part of a broad portfolio. Discover more!

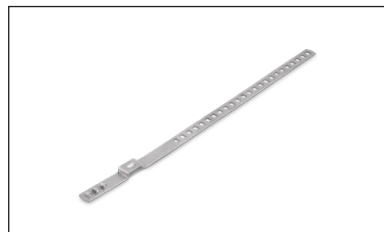

CV Boot clamp



Cobra



Do you have questions or require a personal consultation?

Feel free to contact our NORMA Team! Tel.: +49 6181-403-0

Visit our website for more information about our products: www.norma-connects.com